

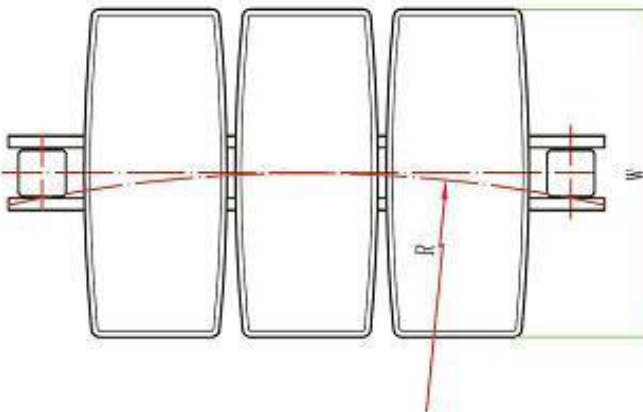


1873 Plastic Snap-on Sideflex Chains

- Main application is for kinds of sideflex conveyor;
- Work Temperature: -30C°~90C°;
- Chain Plates material: POM;
- Color: coffee;
- Roller base chain: standard 12A roller chain
- Roller chain Material: carbon steel(CS) or stainless steel(SS)
- Max speed: 50m/min lubrication; 30m/min dry
- Working load: 3200N (material: CS), 1600N (material: SS)
- Max conveying length: 30m (material: CS), 24m (material: SS)
- Supply unit:1.524mtr (5ft)

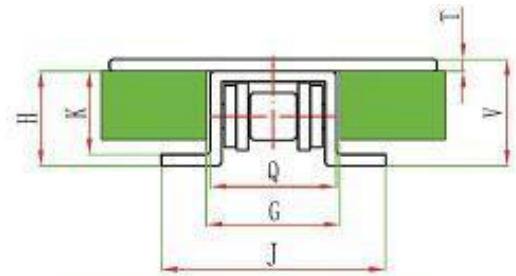

	mm
E	5.1
G	34.9
H	24.5
J	53.5
K	20.5
L	14.2
P	19.05
Q	31.6
T	4.4
V	29

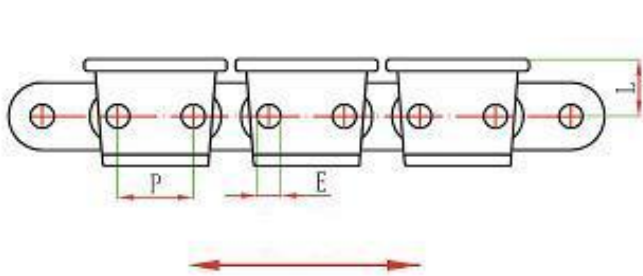

sprocket P401



parts P306-332



wear strip P355-359



guide P343-354



guide341

Code		Plates width (mm)	Weight (Kg/m)	Backflex R (mm)	Min.Radius (mm)
Carbon steel	Stainless steel				
1873-K325	1873SS-K325	82.6	2.10	150	500
1873-K450	1873SS-K450	114.3	2.26	150	500
1873-K600	1873SS-K600	152.4	2.41	150	500
1873-K750	1873SS-K750	190.5	2.56	150	500
1873-K1000	1873SS-K1000	254	2.78	150	500
1873-K1200	1873SS-K1200	304.8	3.01	150	500