



# Plastic snap-on sideflex chain 1873-D

- Main application is for vertical conveying of bottles, cans elevating or turning etc.
- Plates material: POM,
- Rubber material: Natural rubber
- Roller plates chains: standard 12A roller chains,
- Material: carbon steel or stainless steel
- Max speed: 50m/min lubrication; 30m/min dry
- Working load: 3200N (mat.: CS), 1600N (mat.: SS)
- Max conveying length: 30m (mat.: CS), 24m (mat.:SS)
- Supply unit:1.524mtr (5ft)

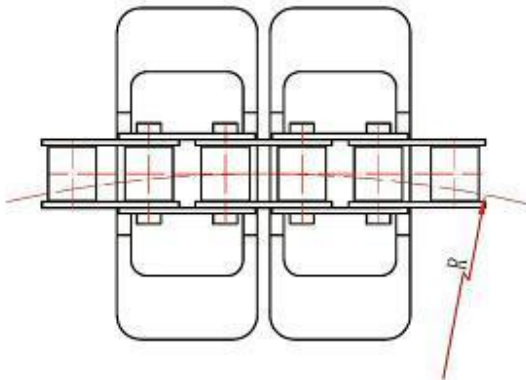

|   | mm    |
|---|-------|
| E | 5.1   |
| G | 34.9  |
| H | 24.5  |
| J | 53.5  |
| K | 20.5  |
| L | 14.2  |
| P | 19.05 |
| Q | 31.6  |
| T | 4.4   |
| V | 29    |
| C | 45.2  |

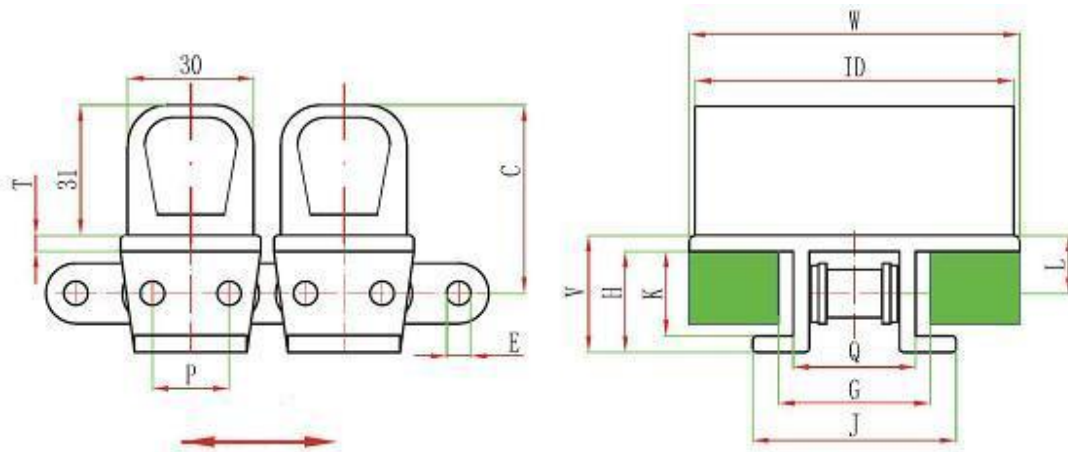

sprocket P401



part P306-332



guide P341



P355-359



guide P343-354

| Code        |               | Plate width (mm) | Rubber width (mm) | Weight (Kg/m) | Backflex R (mm) | Min.Radius (mm) |
|-------------|---------------|------------------|-------------------|---------------|-----------------|-----------------|
| CS          | SS            |                  |                   |               |                 |                 |
| 1873-D-K325 | 1873SS-D-K325 | 82.6             | 80                | 2.9           | 150             | 500             |
| 1873-D-K600 | 1873SS-D-K600 | 152.4            | 152               | 4.1           | 150             | 500             |
| 1873-D-K750 | 1873SS-D-K750 | 190.5            | 186               | 4.5           | 150             | 500             |