



40P/60P Plastic chain

- Main application is for low noise, lightweight, non-magnetic, anti-static conveyors, used in chemical and medicine industries.
- Chain material: POM, Temperature.: -30° \sim 90° ;
- color: white;
- Pin material: stainless steel or PP(for 60P);
- Working load: 440N (40P plastic chain), 880N (60P plastic chain)
- Supply unit: 1.524mtr (5ft)
- 40P match to 08A roller chain sprocket,
60P match to 60P sprocket;
- Weight: 40P 0.57KG/PC; 60P 1.14KG/PC;

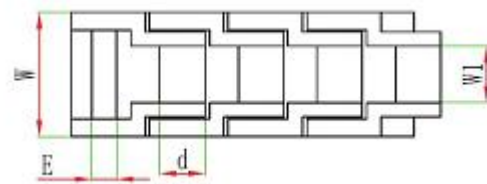

60P with PP Pin

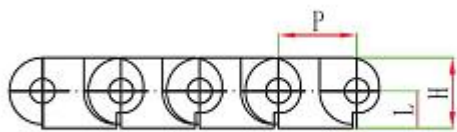

sprocket P397/284



parts P306-332



wear strip P355-359





chain guide P343-354

Code	W(mm)	W1(mm)	P(mm)	E(mm)	H(mm)	L(mm)	d(mm)
40P	20	7.8	12.7	4	13.2	6.4	7.94
60P	30	13.6	19.05	6	17	9	11.9

40P/60P-B Plastic chain

- Main application is for low noise, lightweight, non-magnetic, anti-static conveyors, used in chemical and medicine industries.
- Chain material: POM, Temperature.: -30° \sim 90° ; color: white;
- Pin material: 304stainless steel; Supply unit: 1.524mtr (5ft);
- Working load: 390N (40P-B), 880N (60P-B)
- Weight: 40P-B 0.52KG/PC; 60P-B 1.09KG/PC

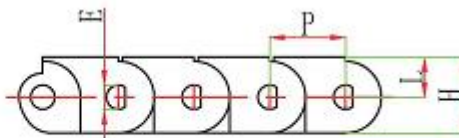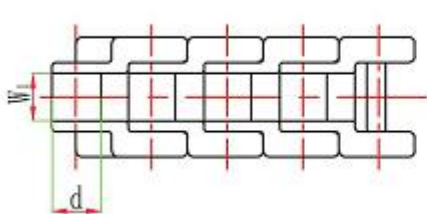

sprocket P397/401



parts P306-332



wear strip P355-359



chain guide P343-354

Code	W(mm)	W1(mm)	P(mm)	E(mm)	H(mm)	L(mm)	d(mm)
40P-B	20	8	12.7	3.9	12.7	6.7	7.94
60P-B	30	12.7	19.05	6	17.3	8.8	11.9