

60P with rubber top plastic chain

- Main application is for low noise, lightweight, non-magnetic, anti-static conveyors, used in chemical and medicine industries;
- Material: PP (Blue) , Work temperature: +1°C ~ +98 °C; also suitable for acid proof area;
- Pin material: stainless steel or PP;
- Supply unit: 1.524mtr (5ft);



sprocket P284





parts P306-332



wear strip P355-359




chain guide P343-354

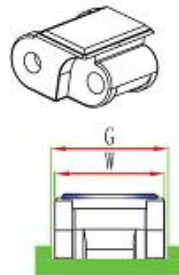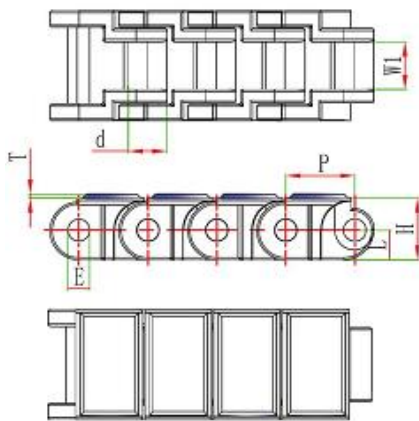

	mm
E	4
G	31
H	17
L	8.2
P	19.05
W	30
W1	13
T	2
d	11.9

60P high temperature resistant plastic chain

- Suitable for high temperature conveying line;
- Material: POM (black), Max Work temperature: +150 °C;
- Pin material: stainless steel;
- Work load: 880N(POM);
- Supply unit: 1.524mtr (5ft); Weight: 1.13KG/PC.

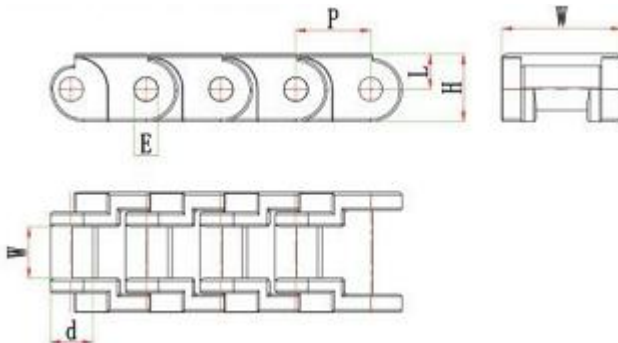

sprocket P284



parts P306-332



wear strip P355-359



chain guide P343-354

Code	W(mm)	W1(mm)	P(mm)	E(mm)	H(mm)	L(mm)	d(mm)
60P	30	13.6	19.05	6	17	9	11