

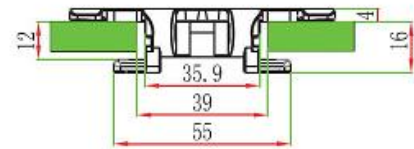


82.6-R150 Sideflex chains with small radius

- Main application: light items transportation and 360° circular transport
- Material: POM. Work temperature: -30°C to 90 °C
- Pin mat.: Stainless steel
- Max speed: 50m/min lubrication 30m/min dry
- Working load (25°C): 2100N, Max.length 12m

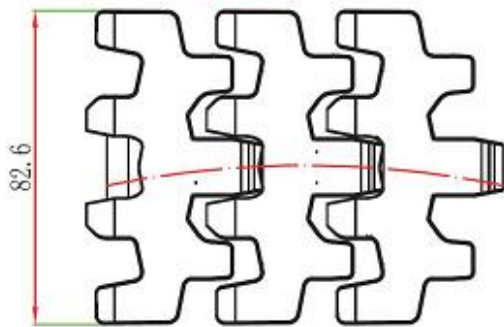

sprocket ref. P45

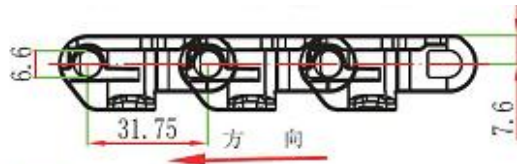

parts ref. P306-332



wear strip ref. P355-359



chain guide ref. P343-354

Code	Width (mm)	Weight (Kg/m)	Backflex radius	Sideflex radius
82.6-R150	82.6	0.86	50	150