

## 822 series straight running chain



- For shrinkage packaging straight running conveyor;
- Material: POM (purple), Work temperature: -30°C ~ +90 °C;
- Pin mat:  $\phi 8$ mm stainless steel.



sprocket P40-41




parts P306-332



wear strip P355-359



chain guide P343-354

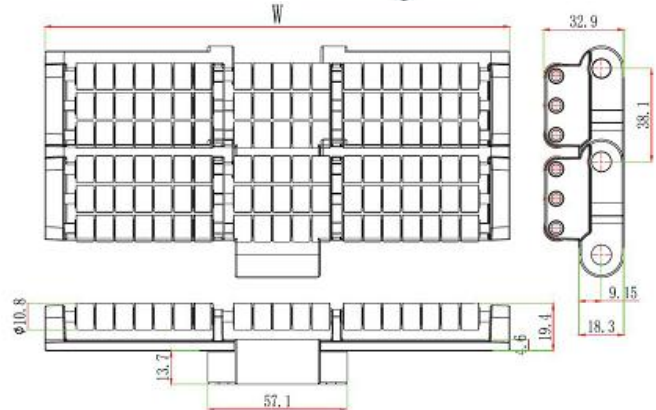

Code	Width (mm)	Weight (Kg/m)	Backflex radius (mm)	Work load N
822-K750	190.5	5.09	101	3830
822-K1000	254	6.41	101	3830
822-K1200	304.8	7.53	101	3830

## 823 series sideflex running chain



- For shrinkage packaging sideflex running conveyor;
- Material: POM (purple), Work temperature: -30°C ~ +90 °C;
- Pin mat:  $\phi 8$ mm stainless steel.



sprocket P40-41




parts P306-332



wear strip P355-359



chain guide P343-354

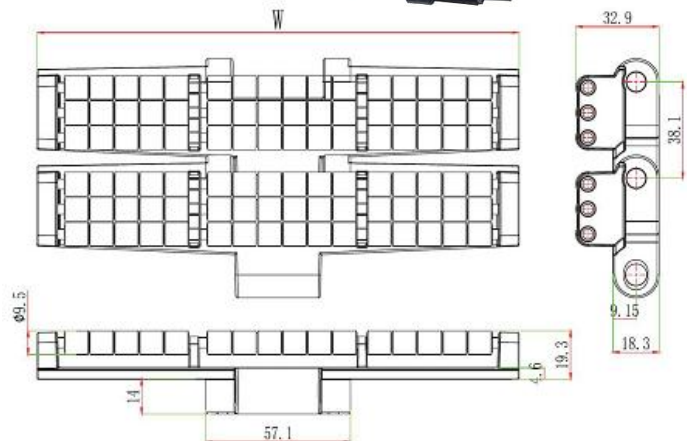

Code	Width (mm)	Weight (Kg/m)	Backflex radius (mm)	Work load N	Sideflex radius (mm)
823-K750	190.5	4.63	200	3830	610
823-K1000	254	5.47	200	3830	610
823-K1200	304.8	6.25	200	3830	680