



# 880 Bevel type Sideflex chains with flat pin

- Main application: food and beverage industry, such as transportation of bottles, cans etc.
- Material: POM. Work temperature: -30°C to 90 °C
- Pin mat.: Stainless steel
- Max speed: 50m/min lubrication 30m/min dry
- Working load (25°C) 2100N, Max.length 9m

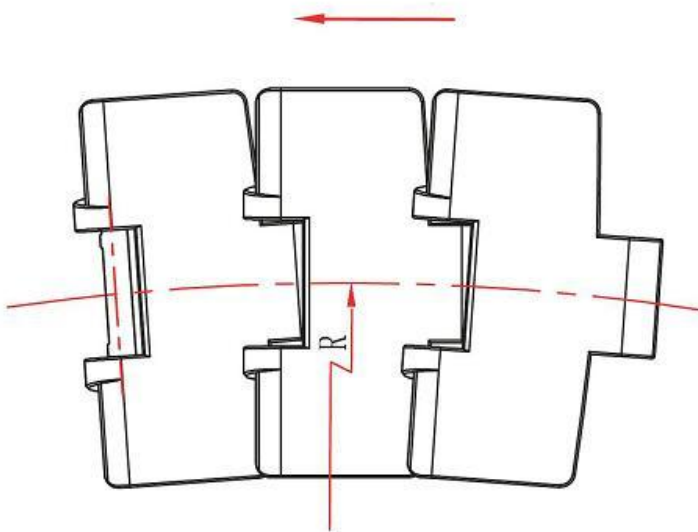

	mm
E	7
H	16
L	7.55
P	38.1
Q	43
T	4

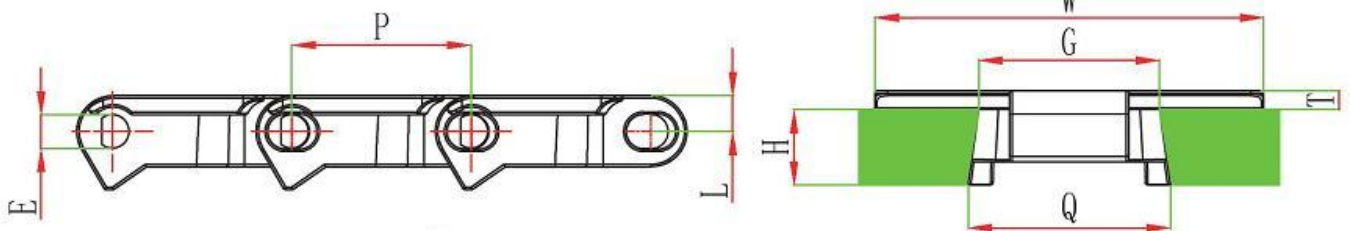

sprocket ref. P37-38



parts ref. P306-332



curve track ref. P335



wear strip ref. P355-359



chain guide ref. P343-354

Code	Width (mm)	Weight (Kg/m)	Backflex radius	Sideflex radius
880-K325 (L13B)	82.6	0.89	75	500
880-K450 (L18B)	114.3	1.04	75	610