


# 880TAB-RT Sideflex chains with small radius

- Main application: transportation for light load conveyor such as transportation of bottles, cans etc.
- Material: POM. Work temperature: -30°C to 90 °C
- Pin mat.: Stainless steel
- Max speed: 50m/min lubrication 30m/min dry
- Working load (25°C) 2100N, Max.length 12m



sprocket ref. P37-38

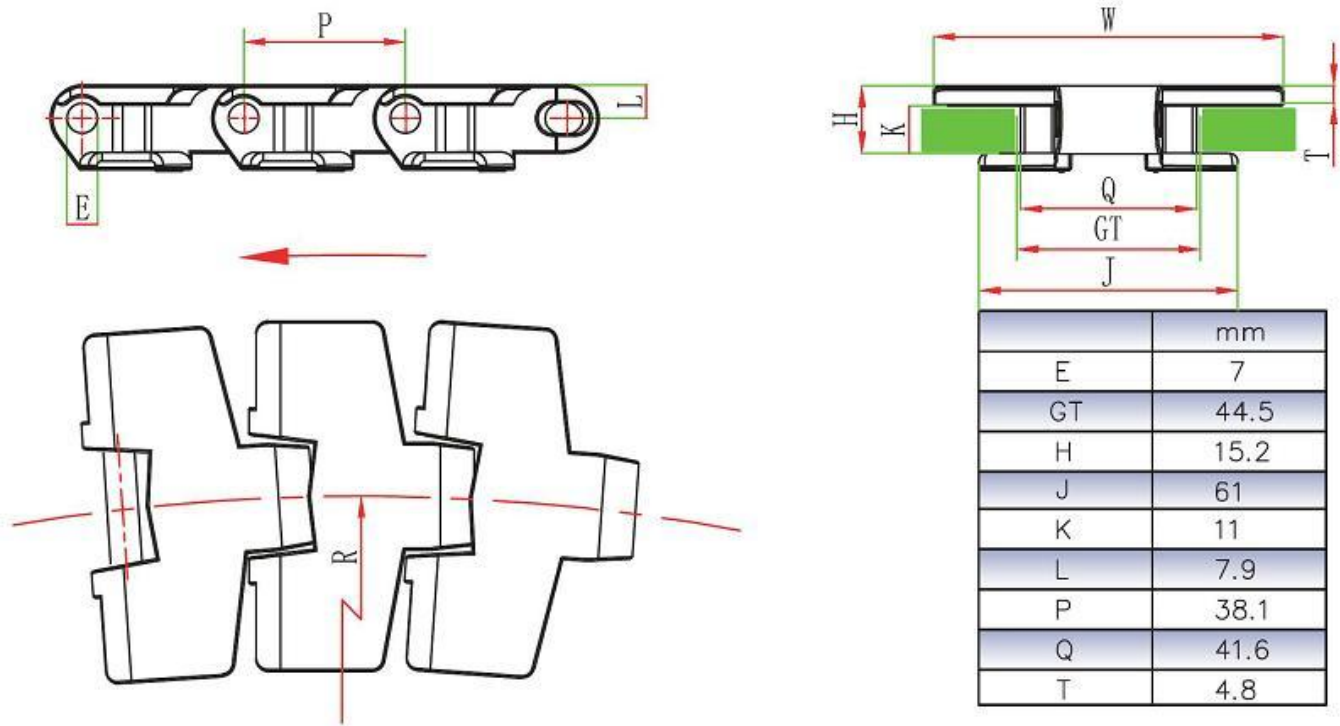

parts ref. P306-332



curve track ref. P337



wear strip ref. P355-359



chain guide ref. P343-354

Code	Width (mm)	Weight (Kg/m)	Backflex radius	Sideflex radius
880TAB-RT-K325	82.6	1.05	75	200
880TAB-RT-K450	114.3	1.15	75	200