

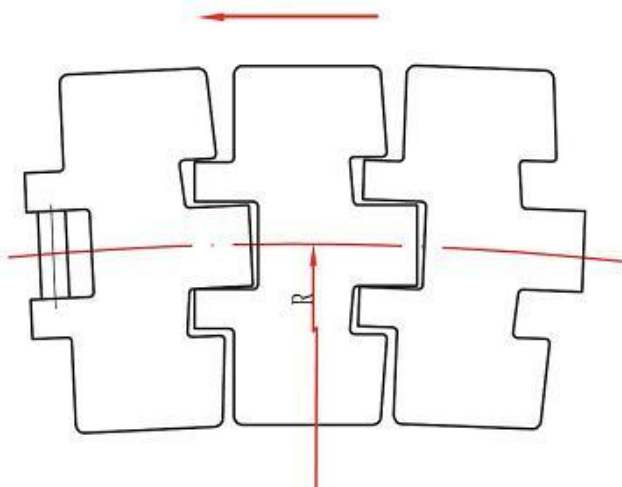


# 881 Stainless steel sideflex chains

- Main Application: transportation for various of glass bottles, and heavy load items
- Material: Stainless steel
- Max.speed: 50m/min, lubrication, 30m/min, dry.
- Working load: 2250N, Max transportation length: 15m

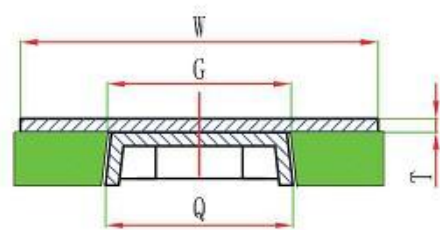

	mm
E	6.35
G	41.3
H	11.9
L	6.4
P	38.1
Q	43.0
T	3

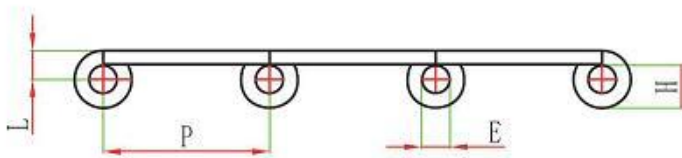

sprocket ref. P75



parts ref. P306-332



wear strip ref. P355-359



chain guide ref. P343-354

Code	Width (mm)	Weight (Kg/m)	Backflex radius	Sideflex radius
SS881-K325(CC13SB)	82.6	3.0	75	460
SS881-K450(CC18SB)	114.3	3.7	75	460
SS881-K600(CC24SB)	152.4	4.4	75	610
SS881-K750(CC30SB)	190.5	5.5	75	610