


# 900-Y-005 Flush Grid Modular belts

- Application: used for Mid pitch conveying, cans, boxes, bottles conveyors.
- Material: POM. Work temperature: -30°C to 90°C
- Work Load: (POM) 17280N/M
- Weight: (POM) 5.79kg/m<sup>2</sup>
- Open area: 38%
- Color: coffee, white, blue



sprocket P187

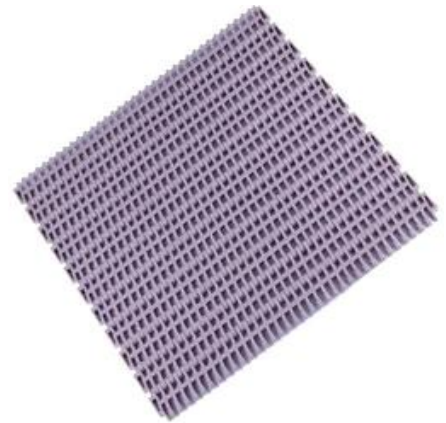



parts P306-332



wear strip P355-359



chain guide P343-354

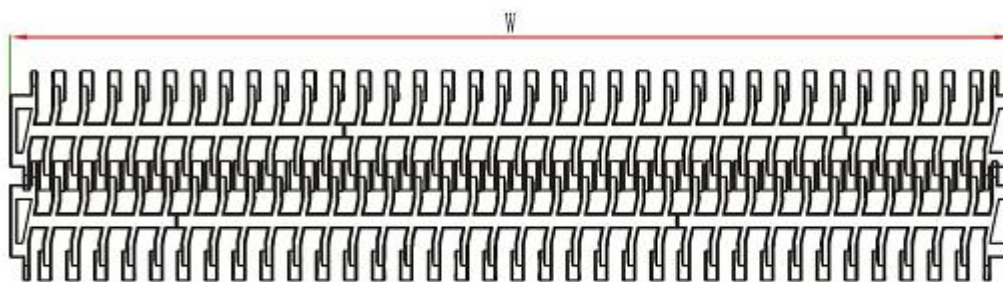

**Standard Width:  $W=152.4*N$**

**Non-standard Width:  $W=152.4*N+8.45*n$**

W mm	152.4	304.8	457.2	609.6	762	914.4	1066.8	1219.2	1371.6	1524	152.4*N
------	-------	-------	-------	-------	-----	-------	--------	--------	--------	------	---------

Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.