




# 900-Y-005 flush gird modular belt with flight+sidewall

Application: used for can manufacturing industry elevating conveying;  
 Flight/sidewall height: 25, 50mm

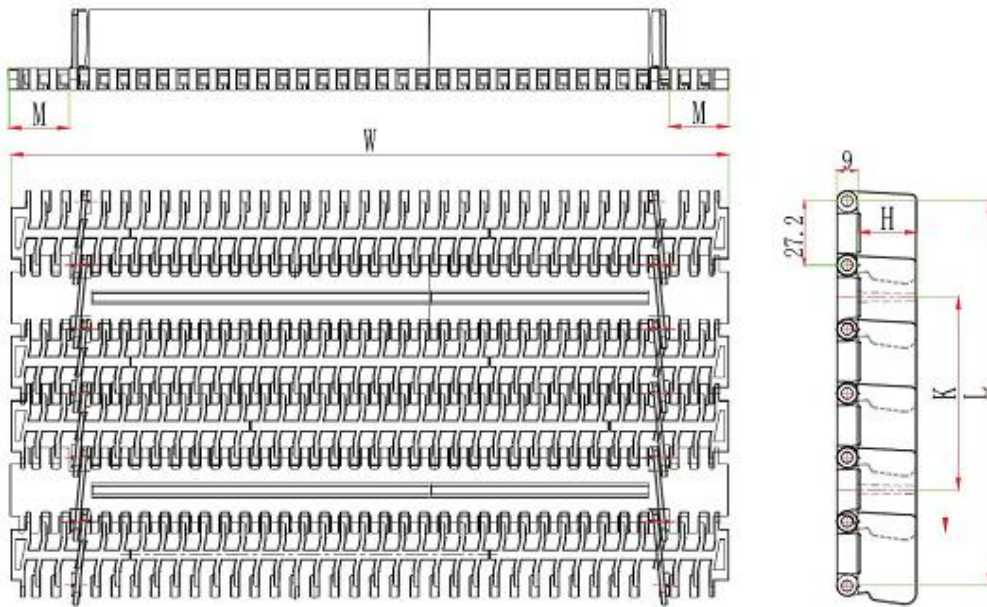

# 900-Y-003 modular belt with rubber top

- Application: Mid pitch conveyor for boxes, bottles and cans;
- raw material: PP belt with rubber top, hardness:  $65 \pm 5$  °C
- Pin material: PP; Work load: PP8080N/M
- Weight: PP 7.93kg/sqm; color: blue belt with black rubber
- The distance between belt side and rubber M: 0, 25.2, 33.7, 42.1, 50.6mm;



sprocket P187




parts P306-332



wear strip P355-359



chain guide P343-354

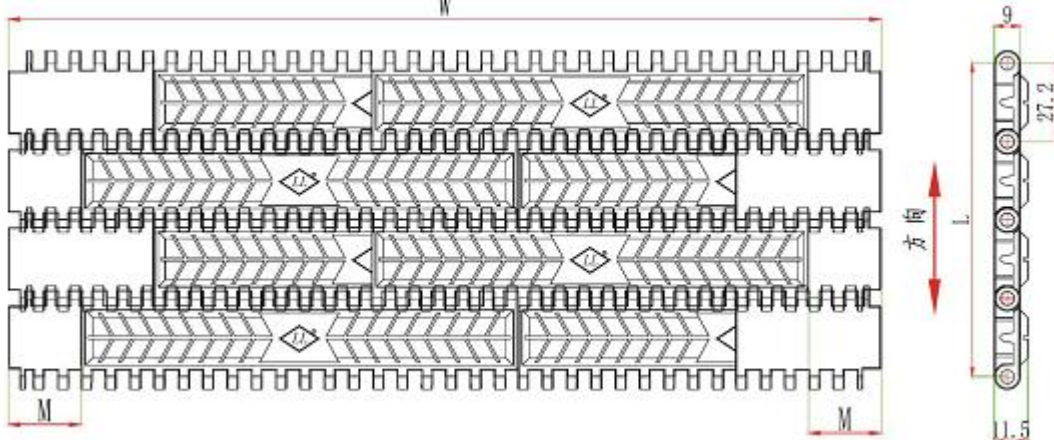

Standard Width:  $W=152.4*N$ ; Non-standard Width:  $W=152.4*N+8.45*n$

W mm	152.4	304.8	457.2	609.6	762	914.4	1066.8	1219.2	1371.6	1524	$152.4*N$
------	-------	-------	-------	-------	-----	-------	--------	--------	--------	------	-----------