


Curved Track for 880TAB/881TAB

- Material: UHMW-PE, color: black ;
- Work temperature: -30°C~+90°C;
- Radian: 15°~90 °;
- Straight track and curved track are suitable for both
- SS881TAB-K325/450 and 880TAB-K325/K450;

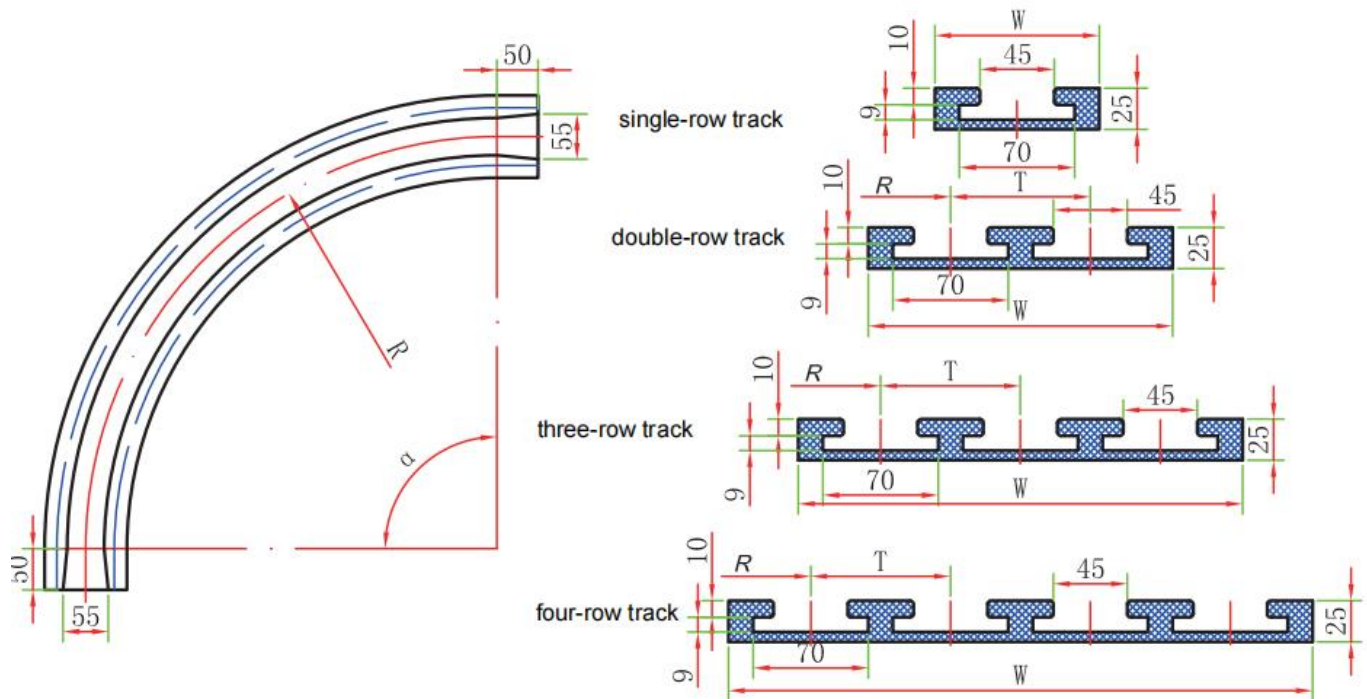

Code Identification: Chain Code+Center Radius+Width+ Number of rows

Item	Code	Min Radius	Width	T
880TAB-K325 single- row	880TAB-K325-R500-100-1	500	100	
880TAB-K325 double-row	880TAB-K325-R500-185-2	500	185	85
880TAB-K325 three- row	880TAB-K325-R500-270-3	500	270	85
880TAB-K325 four- row	880TAB-K325-R500-355-4	500	355	85
880TAB-K450 single- row	880TAB-K450-R500-130-1	500	130	
880TAB-K450 double-row	880TAB-K450-R500-250-2	500	250	120
880TAB-K450 three- row	880TAB-K450-R500-370-3	500	370	120
880TAB-K450 four- row	880TAB-K450-R500-490-4	500	490	120
SS881TAB-K600 single- row	SS881TAB-K600-R610-160-1	610	160	
SS881TAB-K600 double-row	SS881TAB-K600-R610-320-2	610	320	160
SS881TAB-K750 single- row	SS881TAB-K750-R610-200-1	610	200	
SS881TAB-K750 double- row	SS881TAB-K750-R610-400-2	610	400	200