


HF-2700 modular belt

- Application: suitable for all kinds of heavy duty straight or sideflex conveying, mainly used for heat shrink packaging machine, and all kinds of cartons conveying.
- Raw material: Coffee POM with orange rubber top, work temperature: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$;
- Hardness of rubber: $65 \pm 5^{\circ}\text{C}$;
- Pin material: PBT



sprocket P203-205

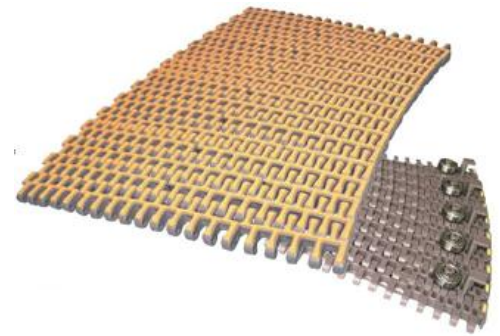


parts P306-332



wear strip P355-359



chain guide P343-354

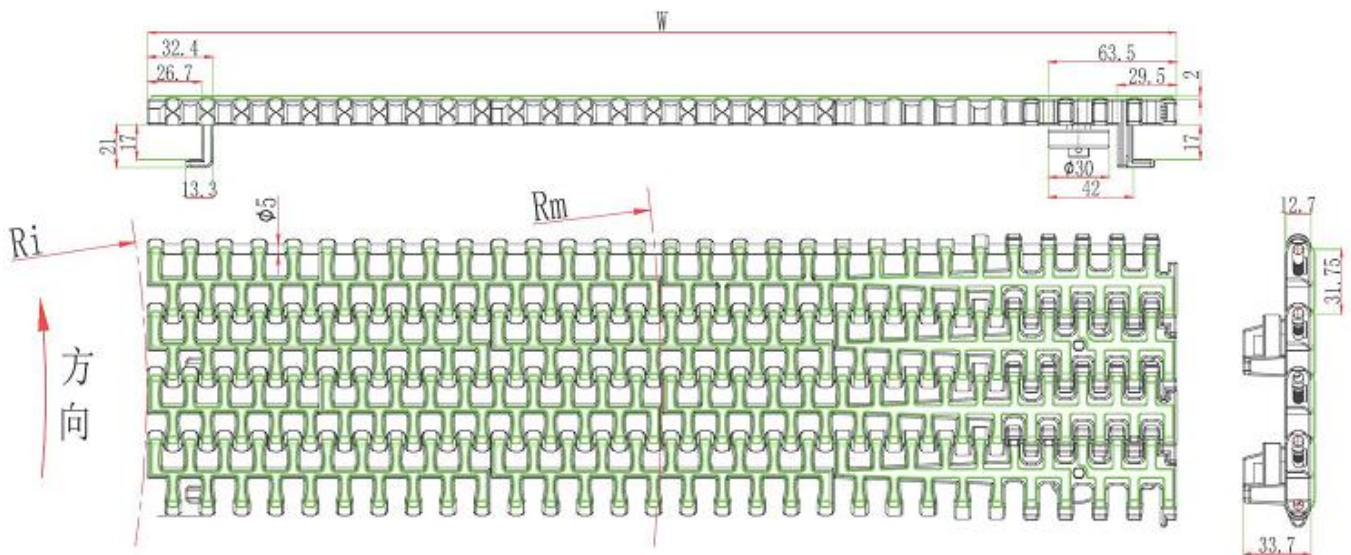

Standard Width: $W=255+85*N$

mm	255	340	425	510	595	680	765	850	$255+85*N$
----	-----	-----	-----	-----	-----	-----	-----	-----	------------

Model	Width mm	Weight kg/m	Inner radius	Central radius
HF-2700-255	255	2.6	510	637.5
HF-2700-340	340	3.4	680	850
HF-2700-425	425	4.1	850	1062.5
HF-2700-510	510	4.8	1020	1275
HF-2700-595	595	5.5	1190	1487.5
HF-2700-680	680	6.3	1360	1700
HF-2700-765	765	7	1530	1912.5
HF-2700-850	850	7.8	1700	2125