



Plastic snap-on chain with rubber top

- Main application: All kinds of sideflex conveyor machine.
- Material.: POM. color coffee; Work temperature:-30°C to 90 °C
- Max conveying length: 30m (mat.: CS) ; 24m (mat.:SS)
- Supply unit:1.524mtr (5ft)

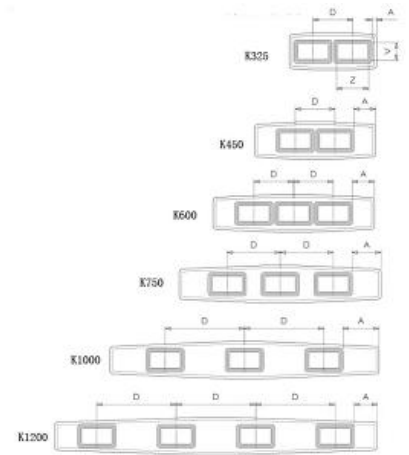

K1:

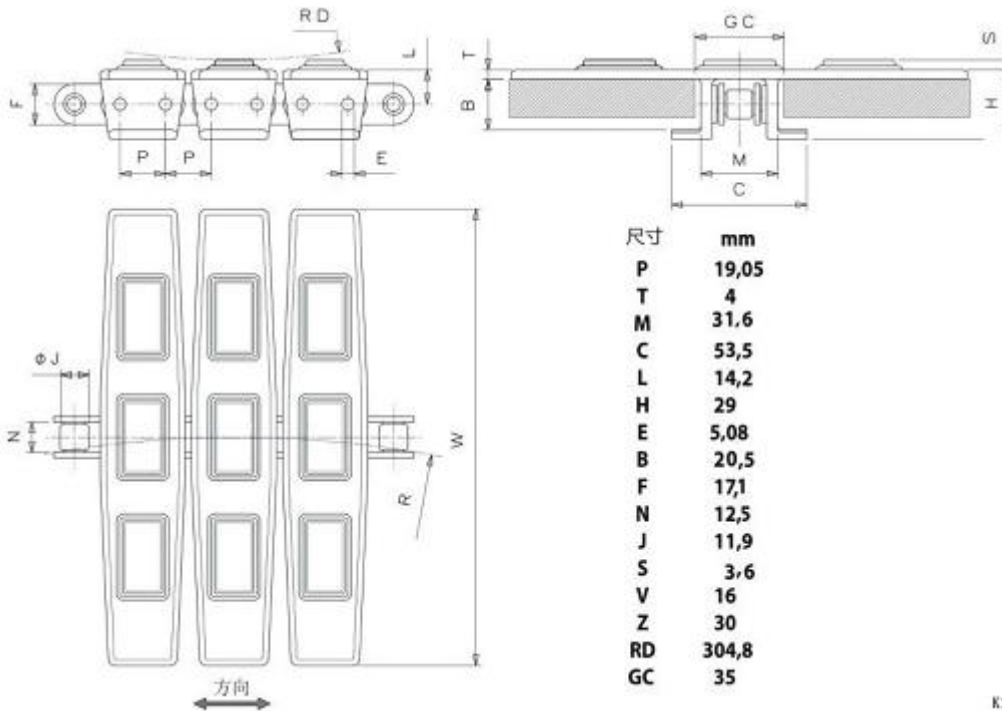

sprocket ref. P40-41



parts ref. P306-332



wear strip ref. P355-359



chain guide ref. P343-354

Code	Width(mm)	Weight(kg/m)	Distance D(mm)	Position A (mm)	Sideflex Radius	material
HF1873-K325	82.6	2.24	39.5	3.5	500	POM+TPE
HF1873-K450	114.3	2.4	39.5	19.4	500	POM+TPE
HF1873-K600	152.4	2.61	39.5	18.7	500	POM+TPE
HF1873-K750	190.5	2.76	50	27.2	500	POM+TPE
HF1873-K1000	254.0	2.98	75	34	500	POM+TPE
HF1873-K1200	304.8	3.28	75	21.9	610	POM+TPE

Remarks: the base chain can choose carbon steel or stainless steel roller chain