



HF821 Double hinge Chain with rubber top

- Main application: transportation of cartons) cans etc
- Material: POM. Work temperature:-30°C to 90 °C
- Pin mat.: Stainless steel

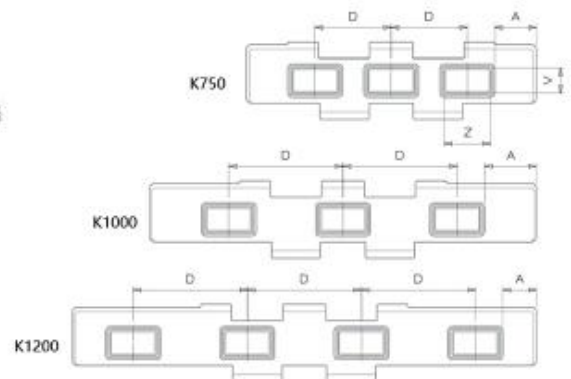

sprocket ref. P27-29

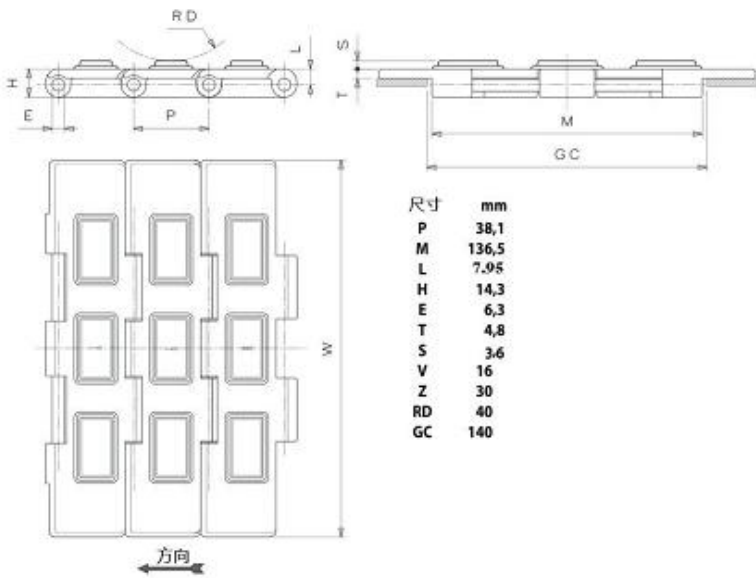

parts ref. P306-332



wear strip ref. P355-359



chain guide ref. P343-354

Code	Width(mm)	Weight(kg/m)	Distance D(mm)	Position A (mm)	material
HF821-K750	190.5	2.68	50	27.2	POM+TPE
HF821-K1000	254.0	2.93	75	34.0	POM+TPE
HF821-K1200	304.8	3.49	75	21.9	POM+TPE