
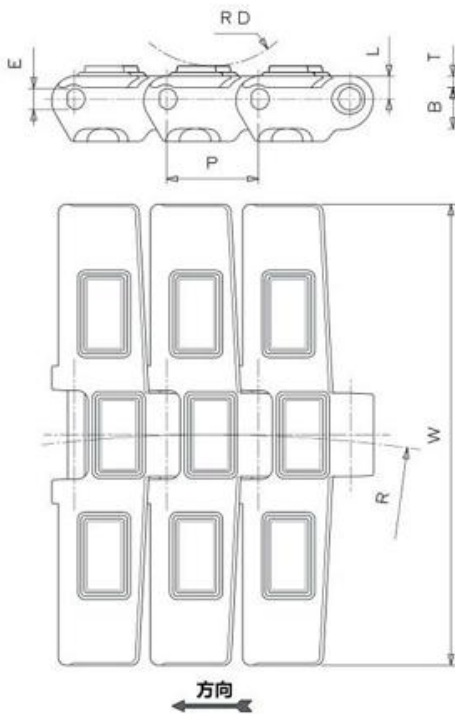



# HF882TAB Side flex chain with rubber top

- Main application: transportation of cartons, cans etc
- Material: POM. Work temperature: -30°C to 90 °C
- Pin mat.: Stainless steel

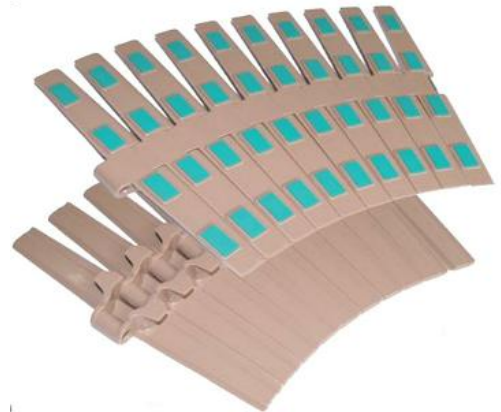

尺寸	mm
P	38,1
M	57
C	76
L	9,5
H	27
E	7,9
B	17
T	4,8
S	3,6
V	16
Z	30
Y	6
RD	40
GC	59

附橡胶垫定位

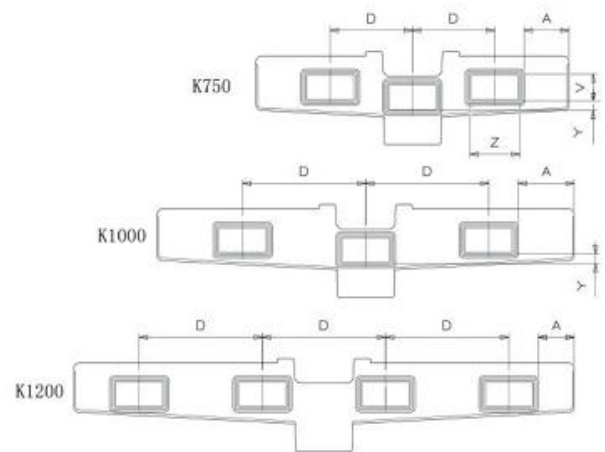

sprocket ref. P40-41



parts ref. P306-332



wear strip ref. P355-359



chain guide ref. P343-354

Code	Width(mm)	Weight(kg/m)	Distance D(mm)	Position A (mm)	Sideflex Radius	material
HF882TAB-K750	190.5	2.65	50	27.2	610	POM+TPE
HF882TAB-K1000	254	2.96	75	34	610	POM+TPE
HF882TAB-K1200	304.8	3.34	75	21.9	610	POM+TPE