


# Sushi chain

- Main application is for food processing, assembly line and for transportation of 360° conveying;
- Material: POM, color:white, temperature range: -30°C~90°C;
- pin material: stainless steel;
- Working load(25°): 4800N, max conveying length: 15m
- Max speed: 30m/min with lubrication; 20m/min dry
- S-76-k450: 13 pcs per meter, S-63-K325: 16 pcs per meter.



sprocket P303/304

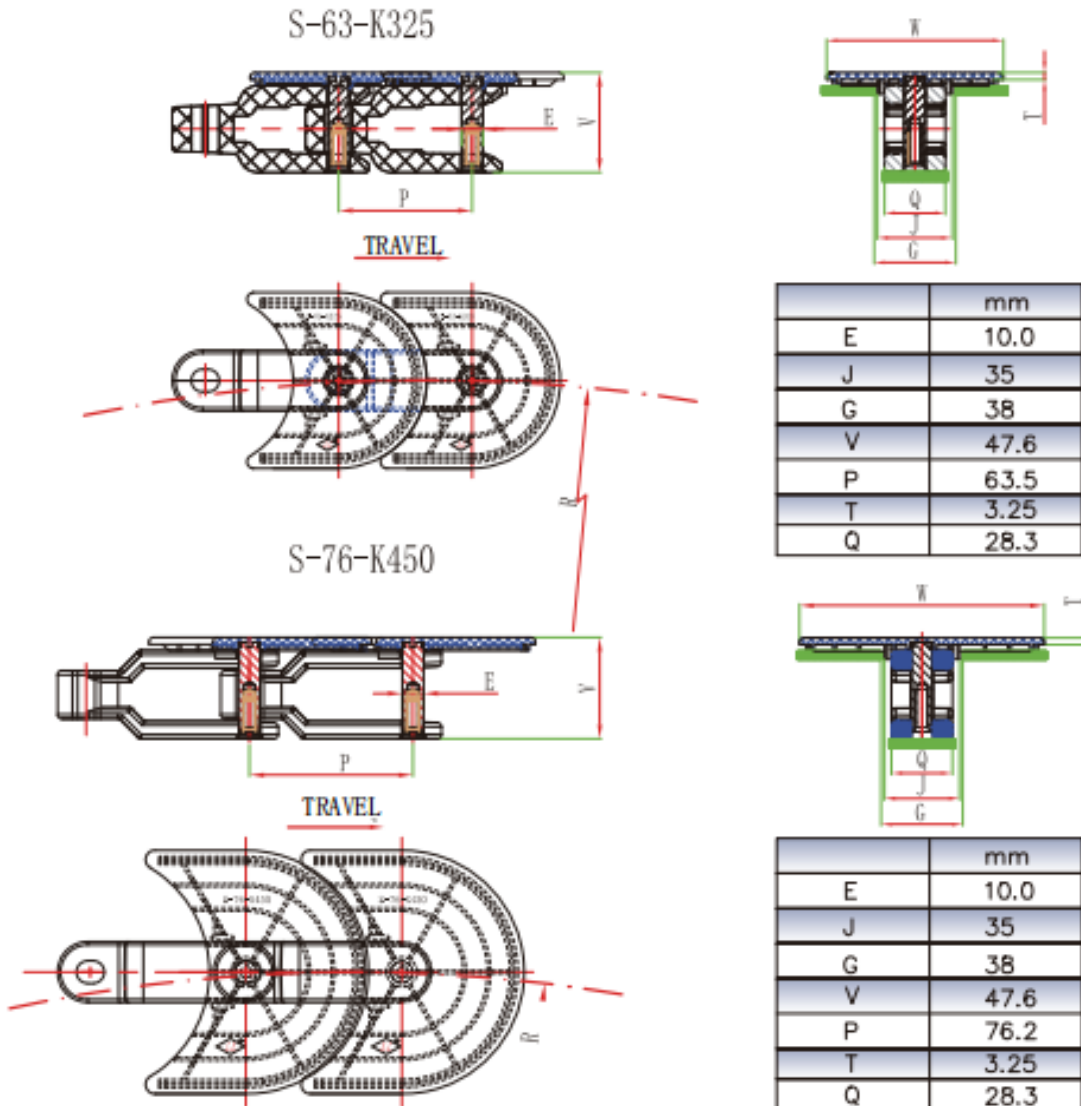

parts P306-332



wear strip P355-359



chain guide P343-354

Code	Width mm	Weight kg/m	Sideflex radius
S-63-k325	82.6	1.65	200
S-76-k450	114.3	1.65	250