

T-100 perforated Modular belts with friction

- Main Application :mostly used for inclined conveyors
- Mat: POM. Work temp: -30°C ~ +90 °C
- Pin mat.: PP
- Load: POM 17280N/M
- Open area: 8%
- Color: white or coffee
- Weight:13.3kg/m2



sprocket P135




parts P306-332



wear strip P355-359



chain guide P343-354

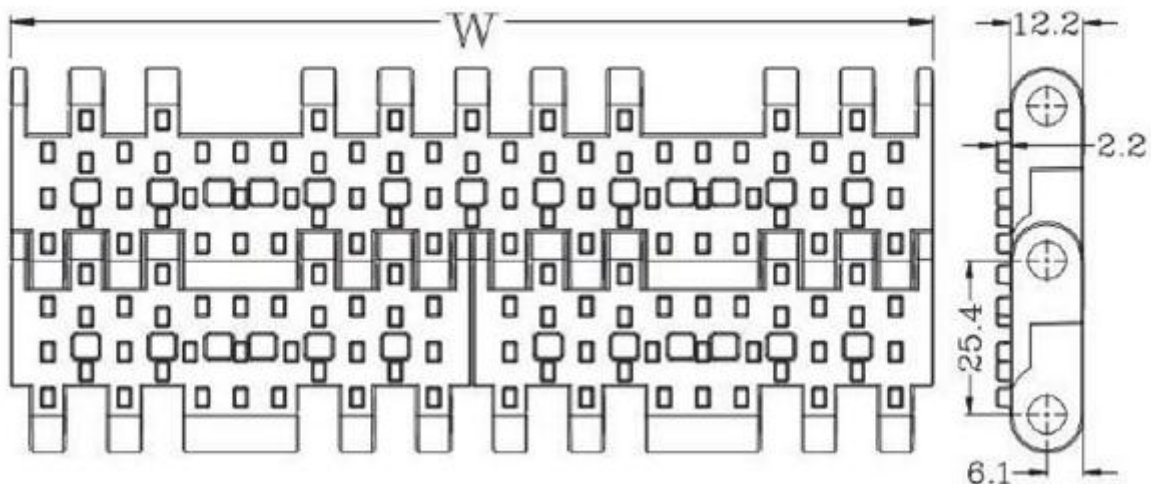

Standard Width: $W=76.2*N$

W (mm)	152.4	304.8	457.2	609.6	762	914.4	1066.8	1219.2	76.2*N
--------	-------	-------	-------	-------	-----	-------	--------	--------	--------

Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.