
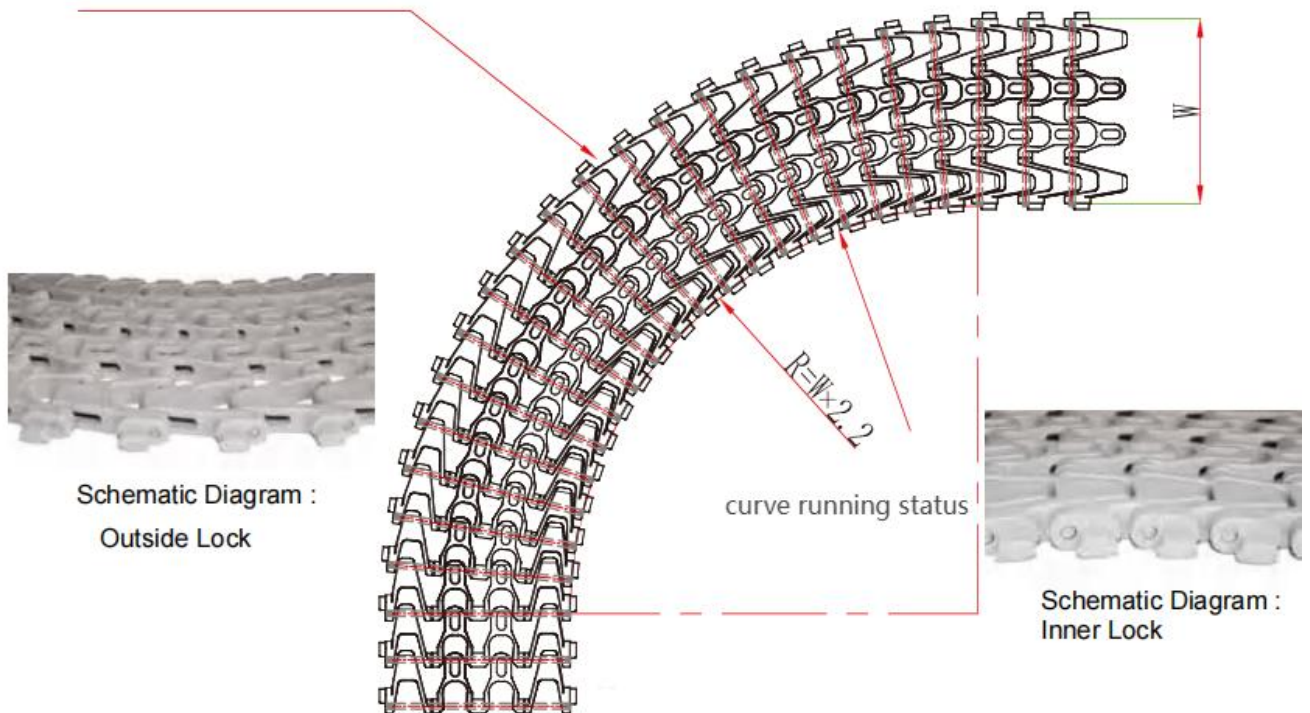



# T-1100 Modular belt

- Application: suitable for the sideflex conveying machine
- Pitch: 50mm;
- Thickness: 15mm;
- Inner radius: 2.2 times of the belt width;
- Raw material: PP belt with stainless steel pin
- Work load: 14000N/M;
- Weight: 8.84kg/sq
- Open area: 43%;
- Color: White.
- Standard width:  $W=200+100*N$

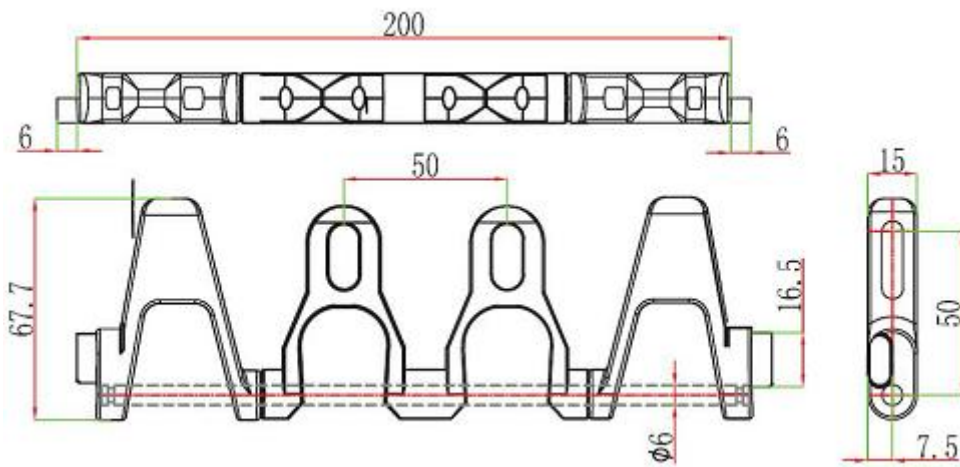

# T-1100 Sprocket

Raw material: nylon PA6

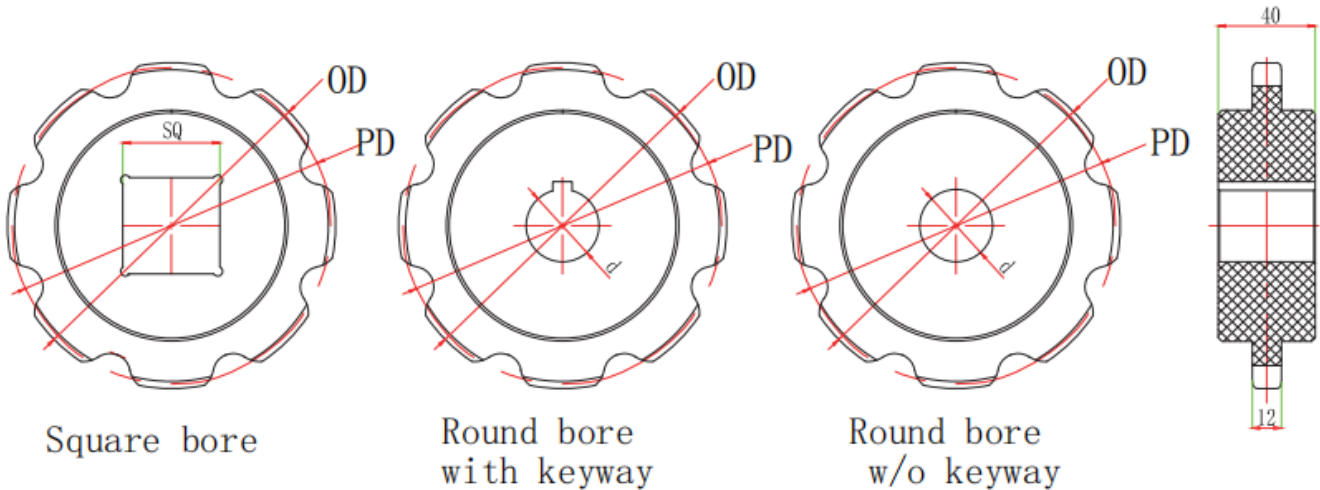

Teeth	Pitch diameter (mm)	Outer diameter (mm)	Bore size (mm)	Sprocket model		
				Square bore	Round bore	
					with keyway	w/o keyway
8	131.31	135.3	25		1-T-1100-8-25	2-T-1100-8-25
			30		1-T-1100-8-30	2-T-1100-8-30
			35		1-T-1100-8-35	2-T-1100-8-35
			40	1-T-1100-8-40X40	1-T-1100-8-40	2-T-1100-8-40
10	162.61	166.6	25		1-T-1100-10-25	2-T-1100-10-25
			30		1-T-1100-10-30	2-T-1100-10-30
			35		1-T-1100-10-35	2-T-1100-10-35
			40	1-T-1100-10-40X40	1-T-1100-10-40	2-T-1100-10-40
12	194.15	198.1	25		1-T-1100-12-25	2-T-1100-12-25
			30		1-T-1100-12-30	2-T-1100-12-30
			35		1-T-1100-12-35	2-T-1100-12-35
			40	1-T-1100-12-40X40	1-T-1100-12-40	2-T-1100-12-40

Remarks: if the bore size below 40mm, the outer diameter above 120mm, it can be processed as split sprocket.