

# T-200PB Flat top Modular belt

- Main application: food industry, and packaging machine conveyor;
- Mat: POM. Work temp: -30°C ~ +90 °C
- Pin Mat: PP
- Load: POM 10500N/M
- Color: blue
- Weight: 6.3kg/sq



sprocket P106




parts P306-332



wear strip P355-359



chain guide P343-354

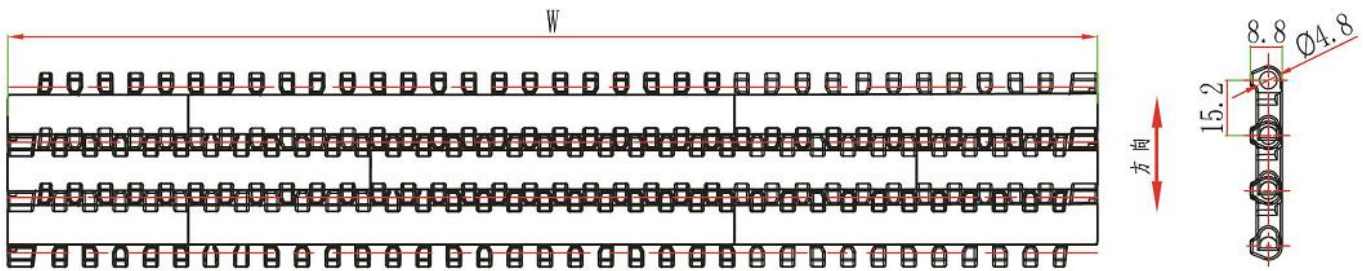

**Standard Width:  $W=152.4*N$**

**Non-standard Width:  $W=152.4*N+25.4*n$**

W (mm)	152.4	304.8	457.2	609.6	762	914.4	1066.8	1219.2	152.4*N
--------	-------	-------	-------	-------	-----	-------	--------	--------	---------

Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.

# T-200PG Flush grid Modular belt

- Main application: food industry, and packaging machine conveyor;
- Mat: POM. Work temp: -30°C ~ +90 °C
- Pin Mat: PP
- Load: POM 10500N/M
- Color: blue
- Weight: 5.7kg/sq
- Open area: 28%



sprocket P106




parts P306-332



wear strip P355-359



chain guide P343-354

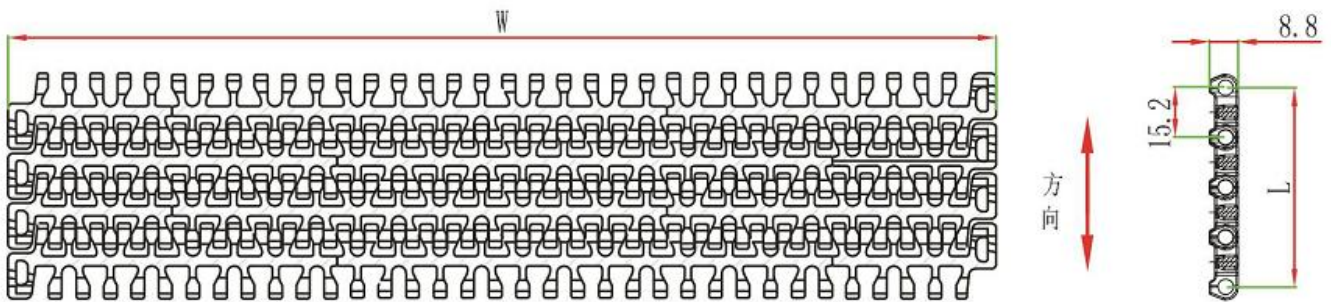

**Standard Width:  $W=152.4*N$**


**Non-standard Width:  $W=152.4*N+25.4*n$**

W (mm)	152.4	304.8	457.2	609.6	762	914.4	1066.8	1219.2	152.4*N
--------	-------	-------	-------	-------	-----	-------	--------	--------	---------


Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.

# T-200 Sprocket


Raw material: Nylon

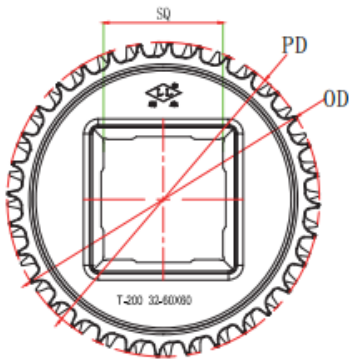


Square bore

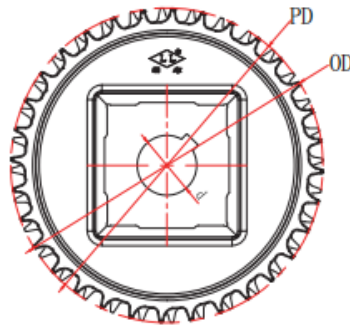

Round bore with keyway

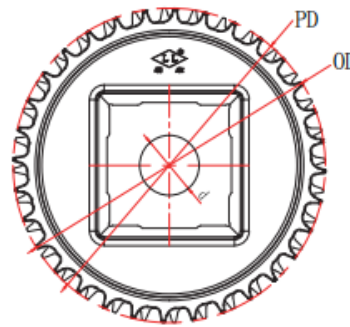

Round bore w/o keyway



Teeth	Pitch diameter (mm)	Outer diameter (mm)	Bore size (mm)	Sprocket model		
				Square bore	Round bore	
					with keyway	w/t keyway
16	75.89	78.8	25		3-T-200-16-25	4-T-200-16-25
			30		3-1-200-16-30	4-T-200-16-30
24	116.5	118.2	25		3-T-200-24-25	4-T-200-24-25
			30		3-T-200-24-30	4-T-200-24-30
			35	3-T-200-24-40X40	3-1-200-24-35	4-T-200-24-35
32	155	157.7	30		3-T-200-32-30	4-T-200-32-30
			40	3-T-200-32-60X60	3-T-200-32-40	4-T-200-32-40