

T-2800 Fixed Radius Modular belt

- Main application :Turning and conveying heavy-duty packaging items, applied to various types of paper box, bag, film packaging;
- Belt material:POM.Working Temperature:-30℃~+100℃;
- Pin material: φ4 Stainless steel
- Belt Color: Grey
- Working load: POM 11900N/M;
- Max Speed:40 meters /min



sprocket P213




parts P306-332



wear strip P355-359



chain guide P343-354

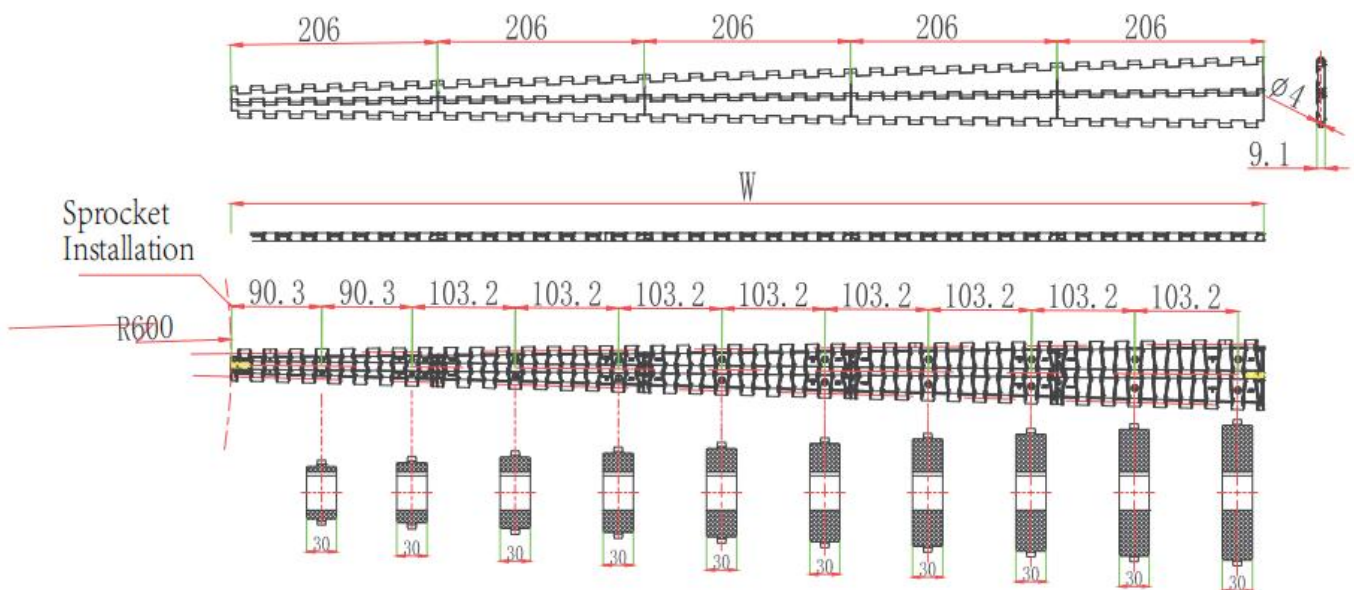

Item	Inner Radius mm	Belt Width W mm	conveyor angle	included angle	Weight kg/m ²
T-2800	600	206、412、619、825、1032	45° 90° 180°	2.6°	7.3
	800	206、412、619、825			
	1000	206、412、619			
	1200	206、412			
	1400	206			

e. g: ①: T-2800 - R600 - 1032 - 45°


e. g. : ②: T-2800 - R800 825 - 90°

e. g. : ③: T-2800 - R1000 619 - 180°

Item code: T-2800 - - -

T-2800 sprocket

Raw material: nylon PA6

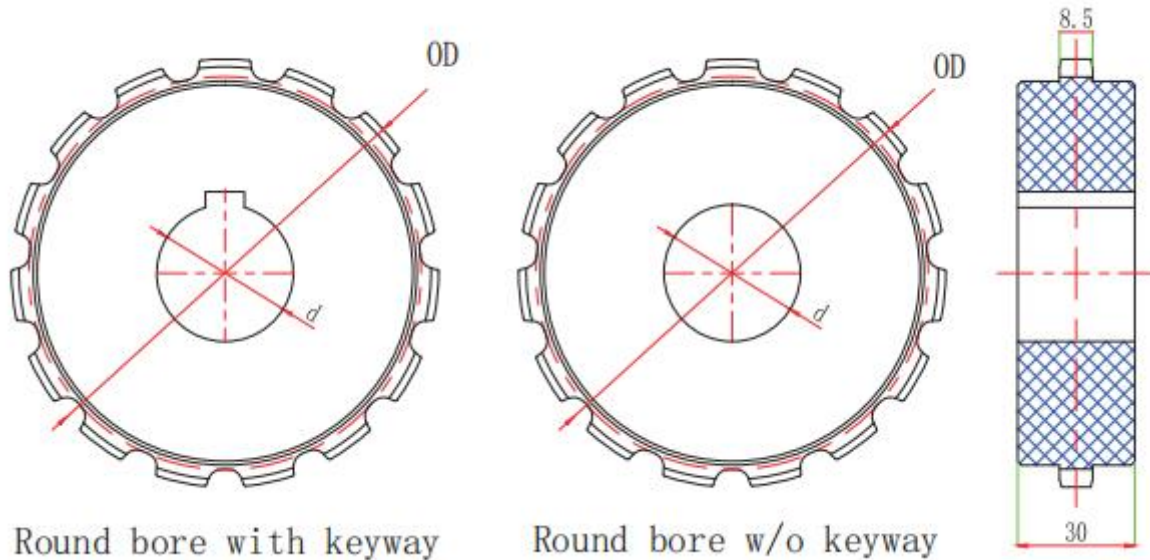

Machined Drive sprockets

Teeth	OD mm	Bore d mm	Sprocket Code	
			Square bore	Round bore
				With keyway w/o keyway
15	64.5	35		1-T-2800①-15-35 2-T-2800①-15-35
15	72.7	35		1-T-2800②-15-35 2-T-2800②-15-35
15	83.2	35		1-T-2800③-15-35 2-T-2800③-15-35
15	91.2	35		1-T-2800④-15-35 2-T-2800④-15-35
15	100.8	35		1-T-2800⑤-15-35 2-T-2800⑤-15-35
15	109.7	35		1-T-2800⑥-15-35 2-T-2800⑥-15-35
15	118.7	35		1-T-2800⑦-15-35 2-T-2800⑦-15-35
15	128	35		1-T-2800⑧-15-35 2-T-2800⑧-15-35
15	137.4	35		1-T-2800⑨-15-35 2-T-2800⑨-15-35
15	145.8	35		1-T-2800⑩-15-35 2-T-2800⑩-15-35