

T-2900 Modular belt with rubber top


Application: For all kinds of cartons ,packages inclined conveyors . The surface rubber increases the friction and protects products above.

Material: POM+Rubber. Work temperature: -30°C ~ +80 °C

Pin material: PP

Load: POM 8640N/M Sprockets same as T-1500

Color:blue Weight:8.4kg/m²

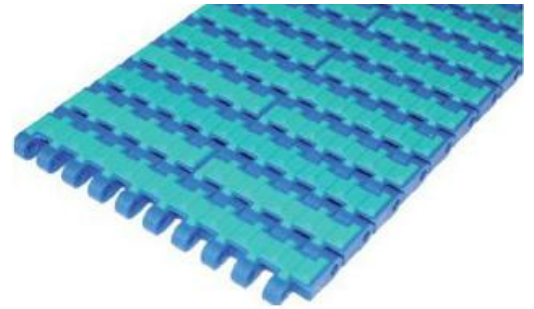

sprocket P158





parts P306-332



wear strip P355-359



chain guide P343-354

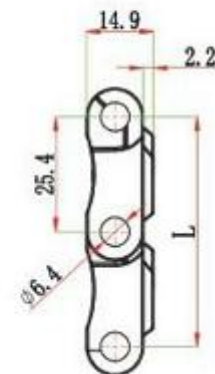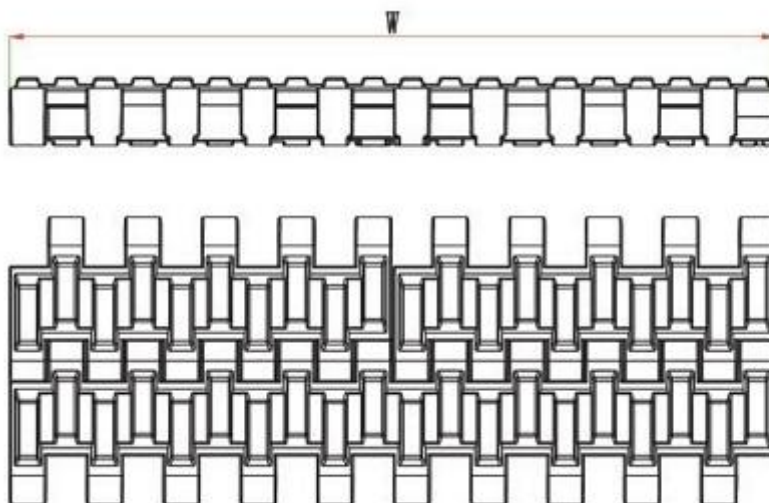

Standard Width: W=85*N

W (mm)	85	170	255	340	425	510	595	680	85*N
--------	----	-----	-----	-----	-----	-----	-----	-----	------

Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.