

T-3100 Modular belt

- Suitable for potato, peanut washing machine
- Raw Material: POM. Work temperature: $-30^{\circ}\text{C} \sim +90^{\circ}\text{C}$ or
- PP. Work temperature: $+1^{\circ}\text{C} \sim +98^{\circ}\text{C}$
- Pin material: PP
- Load: POM 28000N/M PP: 16000N/M
- Color: coffee/white
- Weight: POM 26.7kg/m²; PP 5.7kg/m²
- Brush height can made according to need.



sprocket P174




parts P306-332



wear strip P355-359



chain guide P343-354

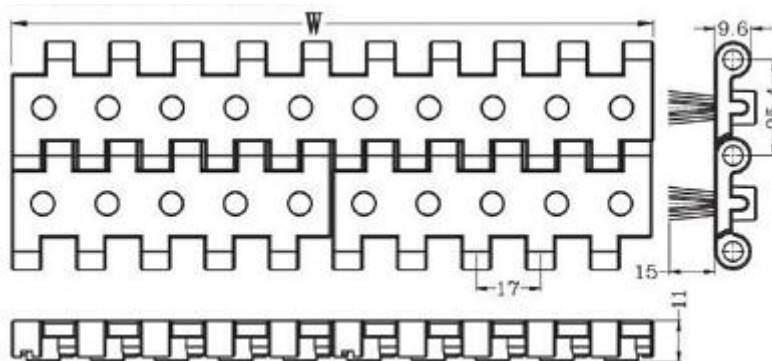

Standard Width: $W=85*N$


W (mm)	85	170	255	340	425	510	595	680	85*N
--------	----	-----	-----	-----	-----	-----	-----	-----	------

Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.

T-3100 Sprocket



Raw material: Nylon PA6

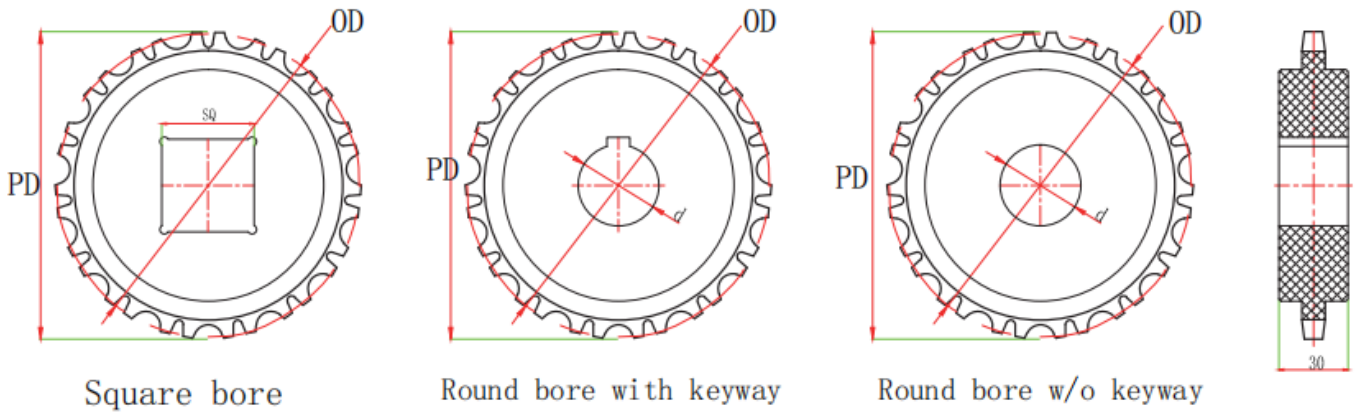

Teeth	Pitch diameter (mm)	Outer diameter (mm)	Bore size (mm)	Sprocket model		
				Square bore	Round bore	
					with keyway	w/o keyway
10	82.2	81	20		1-T-3100-10-20	2-T-3100-10-20
			30		1-T-3100-10-30	2-T-3100-10-30
12	98.14	97	20		1-T-3100-12-20	2-T-3100-12-20
			35		1-T-3100-12-35	2-T-3100-12-35
15	122.17	121	30		1-T-3100-15-30	2-T-3100-15-30
			50	1-T-3100-15-40X40	1-T-3100-15-50	2-T-3100-15-50
18	146.3	145	30		1-T-3100-18-30	2-T-3100-18-30
			50	1-T-3100-18-40X40	1-T-3100-18-50	2-T-3100-18-50
20	162.37	161	30		1-T-3100-20-30	2-T-3100-20-30
			60	1-T-3100-20-40X40	1-T-3100-20-60	2-T-3100-20-60

Remarks: if the bore size below 40mm, and the outer diameter above 120mm, can be processed to split sprocket.