


# T-3300A/B modular belt

- Main application : logistics sorting , it can change by the bottom conveyor, different roller angles can be chosen;
- Material: PP, Working Temperature: +1°C ~ +98°C;
- Roller Material: PP+TPE/POM;
- Pin Material: PP; Roller Pin: Φ4mm SS304;
- Working load (25°C): 26160N/M;
- Opening area: 18%;
- Weight for rubber cover type: 11.5 kg/m<sup>2</sup>;
- Roller Angle  $\gamma=0^\circ, 30^\circ, 60^\circ, 90^\circ, 120^\circ, 150^\circ$ ;



sprocket P229

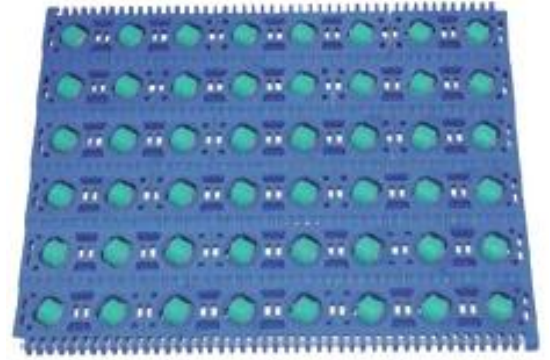

parts P306-332



wear strip P355-359





chain guide P343-354



## Standard width

$$W=257.6+50.8*N$$

## roller direction

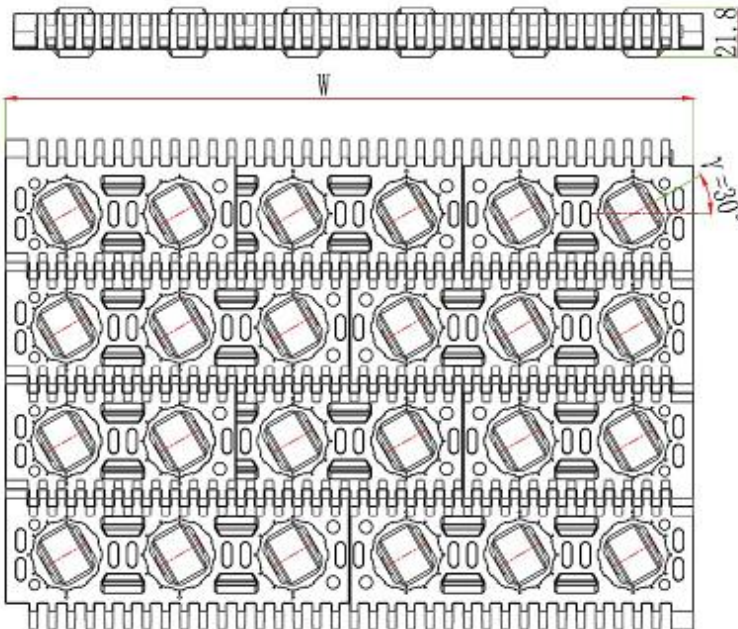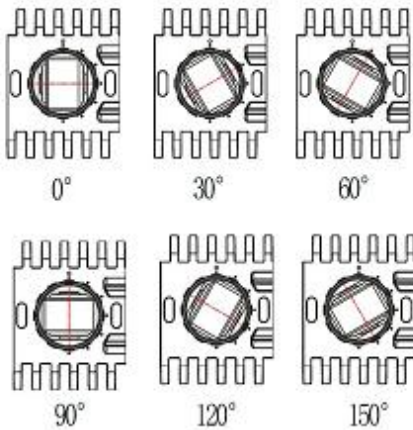


# T-3300C Modular belt

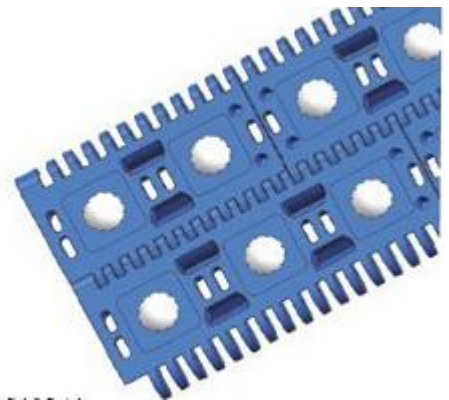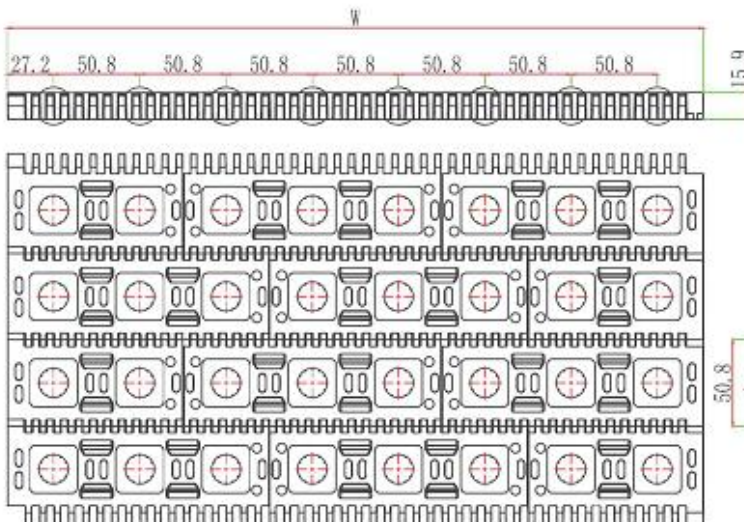

# T-3300 Sprocket

Raw material: nylon PA6

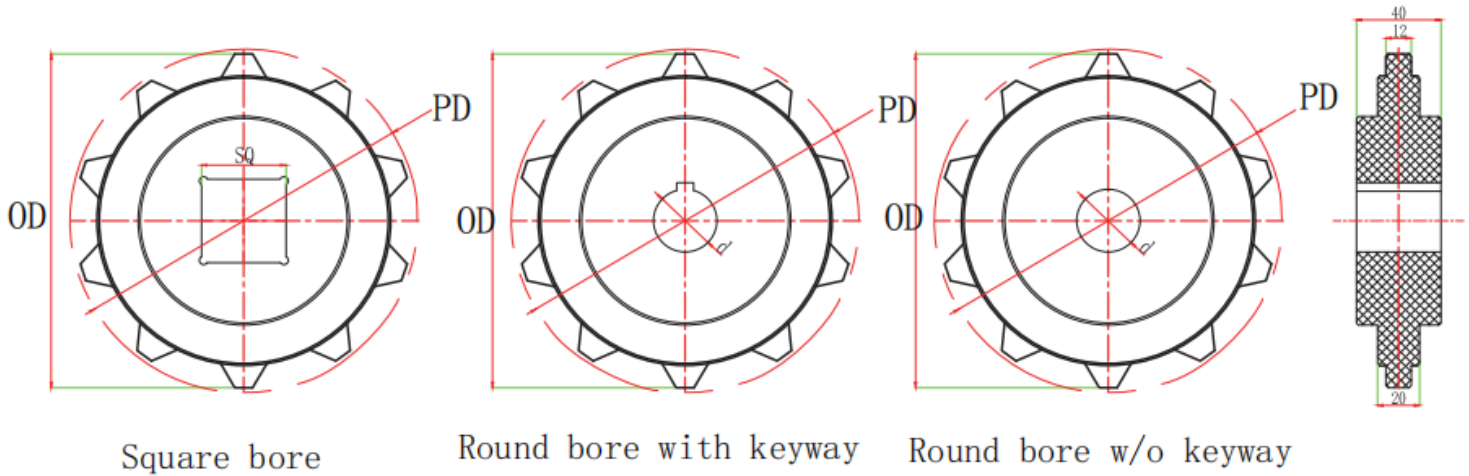

Teeth	Pitch diameter (mm)	Outer diameter (mm)	Bore size (mm)	Sprocket model		
				Square bore	Round bore	
					with keyway	w/o keyway
8	133	126.6	25		1-T-3300-8-25	2-T-3300-8-25
			30		1-T-3300-8-30	2-T-3300-8-30
			35		1-T-3300-8-35	2-T-3300-8-35
			40	1-T-3300-8-40X40	1-T-3300-8-40	2-T-3300-8-40
10	164.72	160	30		1-T-3300-10-30	2-T-3300-10-30
			35		1-T-3300-10-35	2-T-3300-10-35
			40		1-T-3300-10-40	2-T-3300-10-40
			50	1-T-3300-10-40X40	1-T-3300-10-50	2-T-3300-10-50
12	196.66	193.7	30		1-T-3300-12-30	2-T-3300-12-30
			40		1-T-3300-12-40	2-T-3300-12-40
			50		1-T-3300-12-50	2-T-3300-12-50
			60	1-T-3300-12-40X40	1-T-3300-12-60	2-T-3300-12-60