


T-700PB Flat top Modular belt



- Application: Light conveying, plastic & glass bottle, carton, packaging machine conveyor
- Material: POM. Work temperature: -30°C ~ +90 °C
- Work Load :(POM) 10500N/M (PP)5840N/M
- Weight(Pom): 9.06kg/m²
- Color: Coffee

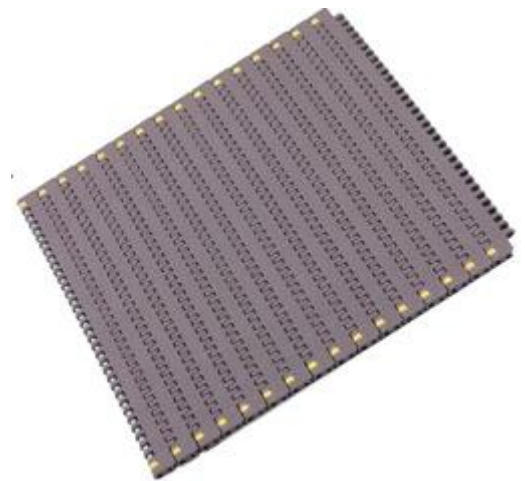

sprocket P129




parts P306-332



wear strip P355-359



chain guide P343-354

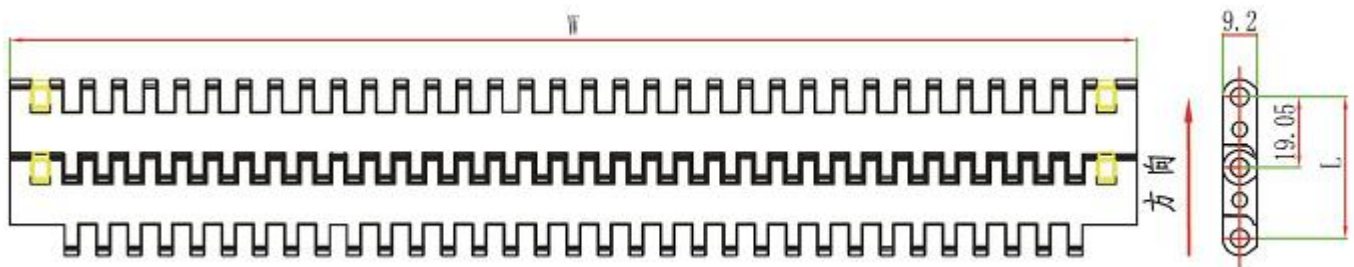

Standard Width: $W=304.8*N$


Non-standard Width: $W=304.8N+8.4*n$

W(mm)	304.8	609.6	914.4	1219.2	304.8*N
-------	-------	-------	-------	--------	---------

Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.

T-700PG Flush grid Modular belt

- Application: Light conveying, plastic & glass bottle, carton, packaging machine conveyor
- Material: POM. Work temperature: -30°C ~ +90 °C
- Work Load :(POM) 10500N/M (PP)5840N/M
- Weight(Pom): 8.78kg/m²
- Color: Coffee
- Open area: 14%

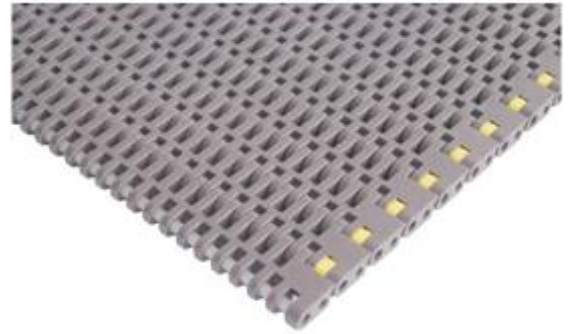

sprocket P129




parts P306-332



wear strip P355-359



chain guide P343-354

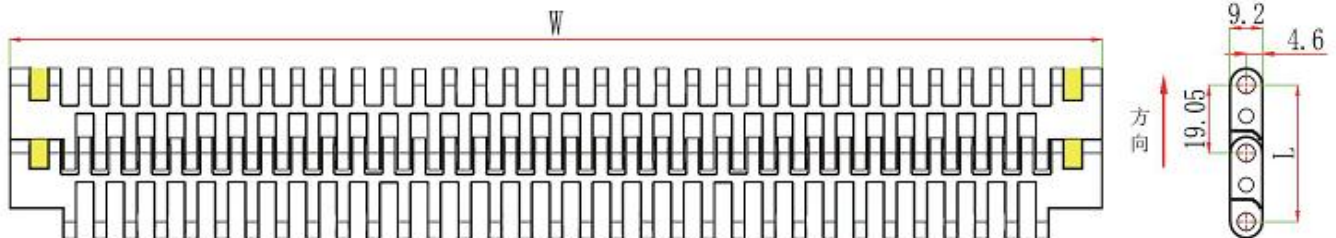

Standard Width: $W=304.8*N$


Non-standard Width: $W=304.8N+8.4*n$

W(mm)	304.8	609.6	914.4	1219.2	304.8*N
-------	-------	-------	-------	--------	---------

Remarks: N, n is the multiples of integers, when design or purchase the belt, please contact the sales first to confirm the actual width.

T-700 Sprocket

Raw material: nylon PA6

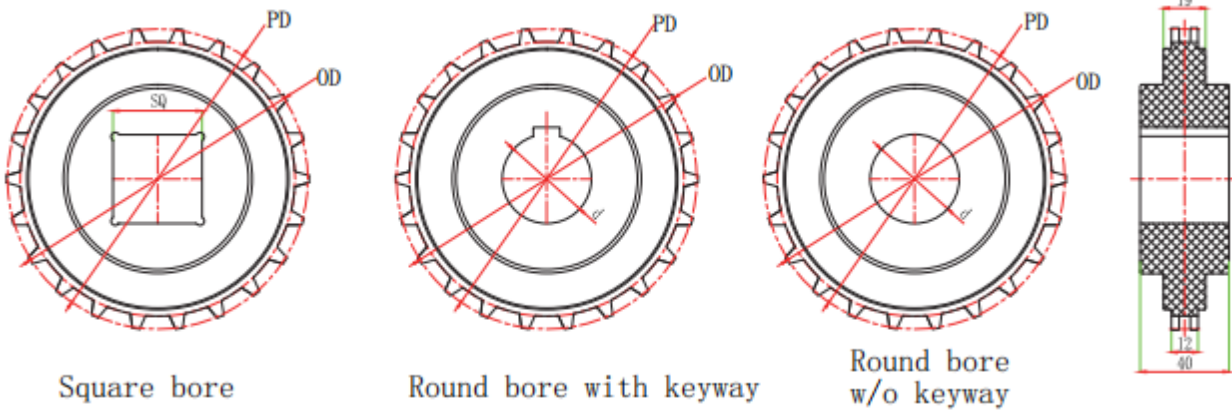

Teeth	Pitch diameter (mm)	Outer diameter (mm)	Bore size (mm)	Sprocket model			
				Square bore		Round bore	
				Sprocket/idler	sprocket	Idler	
14	85.6	88.6	30		3-T-700-14-30	4-T-700-14-30	
20	121.8	122.5	25		3-T-700-20-25	4-T-700-20-25	
			30		3-T-700-20-30	4-T-700-20-30	
			35		3-T-700-20-35	4-T-700-20-35	
			40	1-T-700-20-40X40	1-T-700-20-40	2-T-700-20-40	
22	135.1	136.1	25		1-T-700-22-25	2-T-700-22-25	
			30		1-T-700-22-30	2-T-700-22-30	
			35		1-1-700-22-35	2-T-700-22-35	
			40	1-T-700-22-40X40	1-T-700-22-40	2-T-700-22-40	
24	147.3	148.3	25		1-T-700-24-25	2-T-700-24-25	
			30		1-T-700-24-30	2-T-700-24-30	
			35		1-T-700-24-35	2-T-700-24-35	
			40	1-T-700-24-40X40	1-T-700-24-40	2-T-700-24-40	

If the bore size is below 40mm, and the outer diameter above 120mm, it can be made into split sprocket.